

# New Lancaster

## COLOR FASTNESS

PROPERTY	TEST METHOD	PERFORMANCE
Dry rub fastness, 50 cycles	EN ISO 11640	≥ 3 Grey Scale
Wet rub fastness, 20 cycles	EN ISO 11640	≥ 3 Grey Scale
Artificial solution rub fastness, 20 cycles	EN ISO 11640 / EN ISO 11641	≥ 2 Grey Scale
Fastness to light	EN ISO 105-B02 (Met. 3)	≥ 2/3 Blue Scale

## PHYSICAL CHARACTERISTICS

PROPERTY	TEST METHOD	PERFORMANCE
Tear strength	EN ISO 3377-1	> 20 N

## ADVICES FOR CLEANING AND MAINTENANCE

Avoid any direct exposure to the sun      Dust regularly with a soft and dry cloth

Keep the leather away from direct heat

Flammability test: EN 1021-1, EN 1021-2, BS5852:Source 0, BS5852:Source 1, Cal TB117, NFPA 260/U FAC\*


\* The tests are performed periodically on the leather samples in accordance to the annual audit plan. The standardized production process ensures the conformance to the requirement

THE ARTICLE IS MANUFACTURED IN COMPLIANCE WITH THE REACH DIRECTIVE AND COMPLIES WITH THE LATEST VERSION OF THE RSL\_DANI

## SYSTEM CERTIFICATIONS



## PRODUCT CERTIFICATIONS

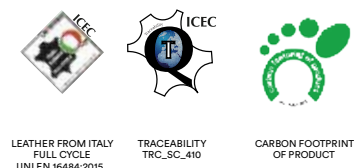

## AWARDS



## JOIN IN



**DANI S.p.A.**  
 Z.I. Via della Concia, 186  
 36071 Arzignano (VI) Italy  
 Tel. +39 0444 454111  
[www.gruppodani.com](http://www.gruppodani.com)



PRODUCT COLORS ARE SUBJECT TO CHANGE, THEIR AVAILABILITY WILL BE CONFIRMED AT THE MOMENT OF THE ORDER.



TESTS ARE PERFORMED PERIODICALLY IN ACCORDANCE WITH THE MOST RECENT PROVISIONS. TO VIEW THE LATEST VERSION: [CLICK HERE.](#)